


## Polyart Laser

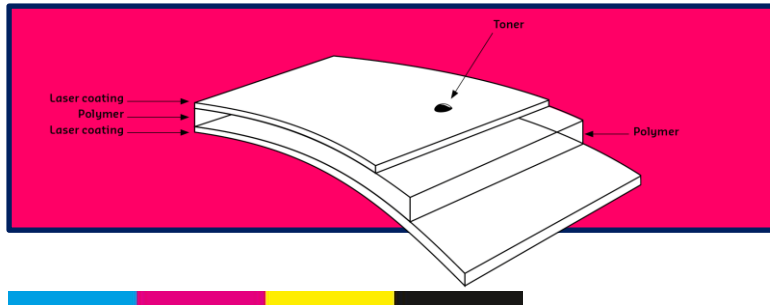

- White opaque PET base film
- High performance matt clay coating on both sides
- Anti-static treatment

Property	Method	Units	Typical values				
Weight	ISO 536	g/m <sup>2</sup>	118	190	261	368	
Thickness	ISO 534	µm	95	145	195	270	
Density		g/cm <sup>3</sup>	1.24	1.31	1.34	1.36	
Brightness	ISO 2470-2	%	96	96	96	96	
Opacity	ISO 2471	%	94	96	98	99	
Tensile strength	ISO 527-3	N/mm <sup>2</sup>					
			MD	108	118	123	118
			TD	116	127	132	127
Elongation @ break (min)	ISO 527-3	%	MD	100	100	100	100
			TD	80	80	80	80

*Advice in this document is based on practical field experience and given in good faith but Arjobex, the manufacturer of Polyart synthetic papers, may not be held liable for loss or damage arising from action based on this information.*

### BENEFITS

- Unique touch, feels like paper
- Matt finish to enhance clarity of colours
- Excellent print reproduction
- Excellent toner adhesion
- Optimum press runnability
- Water and tear resistant