



FillPak[®] M

Simple to install, easy in use



Simple No electricity or training

needed, easy installation



Flexible Paper can be used to protect random box content



Compact

Only requires a small area for set-up and storage

The simple solution for low volume pack station environments



The simple design of the converter allows anyone to shape the single layer paper effectively into a filling material to protect products during shipment. No electricity is needed, and the labor-intensive hand crumpling of paper is eliminated. The fanfolded packs of paper offer easy handling, a minimal loading time and less storage costs. The paper is perforated every 18.6cm, allowing the operator to adjust the paper length to fit every void.



Go Green

Our company works with FSC certified suppliers. Paper is climate neutral, recyclable and also a renewable source.

Specifications of the system

Converter

- Dimensions: 54x40x67-103 cm
- Weight: 4 kg
- Cut method: manual tear perforation every 18.6 cm



Paper

- Base weight: 50 gr/m², 70 gr/m²
- Pack length: 500 m, 360 m
- Paper width: 38 cm
- Average pack weight: 9.5 kg, 9.6 kg
- Average yield: 1.5 m³

Our Added Value



Packaging Engineering

Ranpak analyses and reports on your current packaging solution. The drop test shows exactly how much shock is transmitted to your products through the packaging. Ranpak then suggests alternatives how to improve protection or save costs.



Integrated Applications


The Ranpak Added Value department can design structures, frames and other innovative solutions to integrate the packaging converter anywhere around, above or under a packing area.



Packaging Training

Training from our packaging experts will help your packers to use up to 20% less packing material, without compromising the quality of the packaging.

Successful in these industries

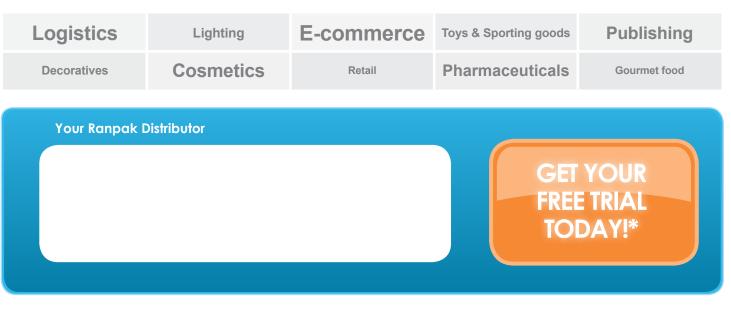

Ranpak BV | T +31 455470470 | E info@ranpakeurope.com | www.ranpakeurope.com

*Ask your distributor for the details of this promotion.