

Description:-


- Range of polyester pressure sensitive label materials
- Durable, strong polyester face materials
- Highly quality, smooth, uniform surfaces
- Gloss clear versions great for 'no-label' look
- Permanent adhesives suitable for indoor or outdoor applications
- Removable versions allow easy removability, without damage to surfaces or tearing of label
- Trouble free running on dry toner equipment, great printability and runnability.
- Easily guillotined & punched
- Extremely strong toner adhesion => scratch resistant print

Compatibility:-

- Suitable for most dry toner (laser/LED/flash fusion) print processes, both mono and colour small-volume, mid-volume & production machines.

Applications:-

- Permanent versions: Water proof labels, Signage, Safety labels, Plant labels, Durable labels
- Removable versions: Window stickers, temporary car stickers, chiller cabinet signage, retail promotions, parking tags, shop window displays, promotional posters, white goods and masonry labels

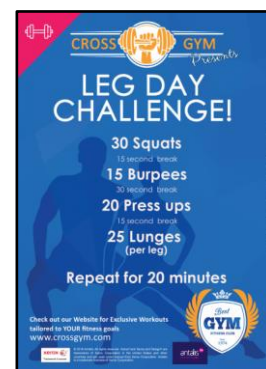

Properties :-

Grade	Adhesive Type	Face Type	Backer Type	Laminate gsm (ISO 536)	Service temperature
Matt White Permanent	Permanent acrylic	Polyester (60 µ)	Polyester (90µ)	210	-20°C - 60°C
Matt White Permanent - paper backer	Permanent acrylic	Polyester (60 µ)	Paper (140g)	236	-20°C - 60°C
Gloss White Permanent	Permanent acrylic	Polyester (53 µ)	Polyester (90µ)	205	-20°C - 60°C
Gloss White Permanent - paper backer	Permanent acrylic	Polyester (53 µ)	Paper (140g)	229	-20°C - 60°C
Gloss Clear Permanent	Permanent acrylic	Polyester (53 µ)	Polyester (90µ)	205	-20°C - 60°C
Gloss Clear Permanent - paper backer	Permanent acrylic	Polyester (53 µ)	Paper (140g)	229	-20°C - 60°C
Matt White Ultra-removable	Ultra removable acrylic	Polyester (60 µ)	Paper (140g)	236	-40°C - 158°C
Gloss Clear Ultra-removabe	Ultra removable acrylic	Polyester (53 µ)	Paper (140g)	238	-40°C - 158°C



Discover all the Xerox Speciality Media Range at www.antalisis.com

